


Trhací nýt s plochou hlavou
Hlava NEREZ A2
TRN NEREZ A2



DIN: 7337A
ČSN: 02 2391
ISO:

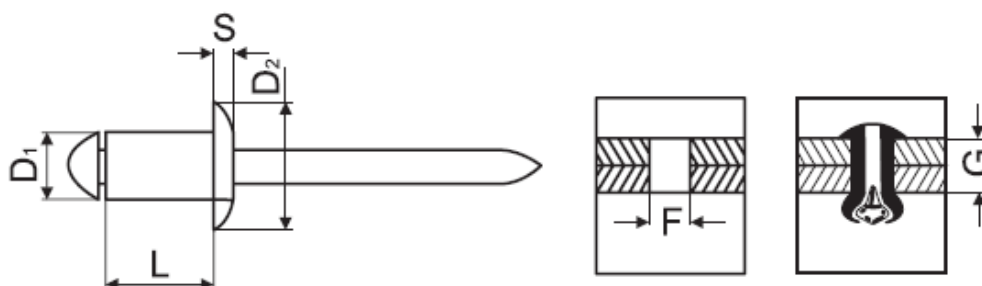

D1: 3,0mm D2: 6,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 0,8mm F: 3,1mm	3,0x6	1,0-3,0	2000N	1600N	9NPS3006II
	3,0x8	3,0-5,0			9NPS3008II
	3,0x10	5,0-7,0			9NPS3010II
	3,0x12	7,0-9,0			9NPS3012II
	3,0x16	11,0-13,0			9NPS3016II

D1: 3,2mm D2: 6,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 0,8mm F: 3,3mm	3,2x6	1,0-3,0	2500N	1800N	9NPS3206II
	3,2x8	3,0-5,0			9NPS3208II
	3,2x10	5,0-7,0			9NPS3210II
	3,2x12	7,0-9,0			9NPS3212II
	3,2x14	8,0-10,0			9NPS3214II
	3,2x16	9,0-12,0			9NPS3216II
	3,2x18	12,0-14,0			9NPS3218II

D1: 4,0mm D2: 8,0mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,0mm F: 4,1mm	4,0x6	1,0-2,5	3800N	3100N	9NPS4006II
	4,0x8	2,5-4,5			9NPS4008II
	4,0x10	4,5-6,5			9NPS4010II
	4,0x12	6,5-8,5			9NPS4012II
	4,0x14	8,5-10,5			9NPS4014II
	4,0x16	9,5-12,0			9NPS4016II
	4,0x18	12,0-14,0			9NPS4018II
	4,0x20	14,0-16,0			9NPS4020II

D1: 4,8mm D2: 9,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,1mm F: 4,9mm	4,8x8	1,5-4,0	6000N	4500N	9NPS4808II
	4,8x10	4,0-6,0			9NPS4810II
	4,8x12	6,0-8,0			9NPS4812II
	4,8x14	8,0-9,5			9NPS4814II
	4,8x16	9,5-11,0			9NPS4816II
	4,8x18	11,0-13,0			9NPS4818II
	4,8x20	13,0-15,0			9NPS4820II
	4,8x22	15,0-17,0			9NPS4822II
	4,8x25	17,0-20,0			9NPS4825II
	4,8x27	18,0-22,0			9NPS4827II
	4,8x30	20,0-25,0			9NPS4830II
	4,8x40	25,0-35,0			9NPS4840II

D1: 5,0mm D2: 9,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,1mm F: 5,1mm	5,0x8	2,0-4,0	6500N	5000N	9NPS5008II
	5,0x10	4,0-6,0			9NPS5010II
	5,0x12	6,0-8,0			9NPS5012II
	5,0x14	8,0-10,0			9NPS5014II
	5,0x16	10,0-12,0			9NPS5016II
	5,0x18	12,0-14,0			9NPS5018II
	5,0x20	14,0-16,0			9NPS5020II

D1: 6,0mm D2: 12,0mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,5mm F: 6,1mm	6,0x10	2,0-4,0	8850N	6500N	9NPS6010II
	6,0x12	4,0-6,0			9NPS6012II
	6,0x15	6,0-9,0			9NPS6015II
	6,0x18	9,0-12,0			9NPS6018II
	6,0x20	10,0-14,0			9NPS6020II
	6,0x22	12,0-16,0			9NPS6022II
	6,0x25	15,0-19,0			9NPS6025II

D1: 6,4mm D2: 13,0mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,8mm F: 6,5mm	6,4x10	2,0-4,0	8850N	6500N	9NPS6410II
	6,4x12	4,0-6,0			9NPS6412II
	6,4x15	6,0-9,0			9NPS6415II
	6,4x18	9,0-13,0			9NPS6418II
	6,4x20	13,0-16,0			9NPS6420II
	6,4x25	16,0-20,0			9NPS6425II